

LEADED INDUCTORS

OPERATION TEMP.

-25~+85°C (Including self-generated heat)



FEATURES

- ABCO Axial inductor is wire wound on the ferrite core.
- Extremely reliable inductors that are ideal for signal and power line applications
- Highly efficient automated production processes can provide high quality inductors in large volumes.

APPLICATIONS


- Consumer electronics (such as VCR, TV, Audio, equipment, general electronic appliances.)

ORDERING CODE

AL	03	TB	R22	K
①	②	③	④	⑤

MARKING

AL02, ALC02, AN02



AL03, 04, 05



※AL02, ALC02, AN02TYPE

J GRADE→③Figure(Double coding)

①TYPE	
AL	Axial Inductor Standard type
ALC	Axial Inductor Standard High current type
AN	Axial Inductor High current type

②BODY SIZE (D × L)[mm]	
02	2.5 × 3.4(AL, ALC)
	2.5 × 3.7(AN)
03	3.0 × 7.0
04	4.2 × 9.8
05	4.5 × 14.0


③TAPING CONFIGURATIONS[mm]	
TA	Axial lead(26mm lead space) /ammo pack(02/03type)
TB	Axial lead(52mm lead space) /ammo pack(all types)

④NOMINAL INDUCTANCE [μ]	
R22	0.22
1R5	1.5
120	12

⑤INDUCTANCE TOLERANCE[%]	
J	±5
K	±10
M	±20

COLOR	INDUCTANCE [μ H]			
	1st figure	second figure	Multiplier	Tolerance
	①	②	③	④
Black	0		× 1	± 20%
Brown	1		× 10	-
Red	2		× 100	-
Orange	3		× 1000	-
Yellow	4		-	-
Green	5		-	-
Blue	6		-	-
Purple	7		-	-
Gray	8		-	-
White	9		-	-
Gold	.		× 0.1	± 5%
Silver	.		× 0.01	± 10%

■ APPEARANCE DIMENSIONS

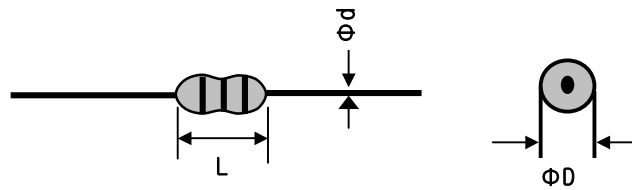

Type	Dimensions [mm]			Taped	
	L	ΦD	Φd	Straight	
AL02	3.4max	2.5max	0.50 ± 0.05	TB	
ALC02	3.4max	2.5max	0.50 ± 0.05		
AN02	3.7max	2.5max	0.50 ± 0.05		
AL02	3.4max	2.5max	0.45 ± 0.05	TA	
ALC02	3.4max	2.5max	0.45 ± 0.05		
AN02	3.7max	2.5max	0.45 ± 0.05		
AL03	7.0max	3.0max	0.50 ± 0.05	TA	
				TB	
AL04	9.8max	4.2max	0.65 ± 0.05	TA	
AL05	14.0max	4.5max	0.65 ± 0.06		

■ AVAILABLE INDUCTANCE RANGE

TYPE	Range	0	1	10	100	1000	2200	8200	10000	15000
AL02	I _{max.} (mA)		270	160	44					
	INDUCTANCE (μH)	0.22		470						
	R _{dc} (mΩ)		0.8	2.3	12					
ALC02	I _{max.} (mA)		510	270	105					
	INDUCTANCE (μH)	0.22		100						
	R _{dc} (mΩ)		0.4	1.4	9.1					
AN02	I _{max.} (mA)		500	280	120					
	INDUCTANCE (μH)	0.12		470						
	R _{dc} (mΩ)		0.32	1	5.6					
AL03	I _{max.} (mA)		270	160	90	40				
	INDUCTANCE (μH)	0.22		1000						
	R _{dc} (mΩ)		0.8	2.3	7	33				
AL04	I _{max.} (mA)		920	500	275	100	80	45	35	
	INDUCTANCE (μH)	0.22		10000						
	R _{dc} (mΩ)		0.19	0.58	1.8	14	40	116	148	
AL05	I _{max.} (mA)		5600	2100	700	240				
	INDUCTANCE (μH)	1.0		1500						
	R _{dc} (mΩ)		0.022	0.062	0.48	5.8				

ITEM-PART NUMBERS

AL02

Ordering code	Inductance [μ H]	Inductance Tolerance	Q (min.)	Self-resonant frequency [MHz] (min.)	DC Resistance [Ω] (max.)	Rated Current [mA] (max.)	Measuring frequency [MHz]
AL02TOR22K	0.22	$\pm 10\%$ ($\pm 5\%$)	35	410	0.40	400	25.2
AL02TOR27K	0.27			410	0.43	380	
AL02TOR33K	0.33			360	0.48	370	
AL02TOR39K	0.39			300	0.51	350	
AL02TOR47K	0.47			230	0.56	330	
AL02TOR56K	0.56			210	0.61	320	
AL02TOR68K	0.68			190	0.67	310	
AL02TOR82K	0.82			170	0.74	290	
AL02TO1R0K	1.0			150	0.80	270	
AL02TO1R2K	1.2			110	0.90	260	
AL02TO1R5K	1.5		80	1.0	250		
AL02TO1R8K	1.8		60	1.1	240		
AL02TO2R2K	2.2		45	1.2	230		
AL02TO2R7K	2.7		40	1.3	220		
AL02TO3R3K	3.3		38	1.4	210		
AL02TO3R9K	3.9		35	1.6	200		
AL02TO4R7K	4.7		32	1.7	190		
AL02TO5R6K	5.6		30	1.9	180		
AL02TO6R8K	6.8		28	2.0	175	2.52	
AL02TO8R2K	8.2		26	2.2	165		
AL02TO100K	10		24	2.3	160		
AL02TO120K	12		22	2.5	150		
AL02TO150K	15		20	2.8	145		
AL02TO180K	18		18	3.1	140		
AL02TO220K	22		17	3.4	130		
AL02TO270K	27		16	4.3	80		
AL02TO330K	33		14	4.7	76		
AL02TO390K	39		13	5.2	74		
AL02TO470K	47		12	5.8	70	0.796	
AL02TO560K	56		11	6.4	68		
AL02TO680K	68		10	7.2	64		
AL02TO820K	82		9.5	11.0	46		
AL02TO101K	100		9.0	12.0	44		
AL02TO121K	120		8.0	13.0	42		
AL02TO151K	150		6.0	16.0	39		
AL02TO181K	180	5.5	18.0	37			
AL02TO221K	220	5.0	20.0	35			
AL02TO271K	270	4.6	26.0	28			
AL02TO331K	330	4.4	27.0	26			
AL02TO391K	390	4.1	28.0	25			
AL02TO471K	470	3.7	30.0	24			

○Please specify the taping configuration code.

○:A,B

ITEM-PART NUMBERS

ALC02

Ordering code	Inductance [μ H]	Inductance Tolerance	Q (min.)	Self-resonant frequency [MHz] (min.)	DC Resistance [Ω] (max.)	Rated Current [mA] (max.)	Measuring frequency [MHz]	
ALC02TOR22K	0.22	$\pm 10\%$ ($\pm 5\%$)	50	450	0.20	730	25.2	
ALC02TOR27K	0.27			400	0.21	700		
ALC02TOR33K	0.33			350	0.23	670		
ALC02TOR39K	0.39			320	0.25	640		
ALC02TOR47K	0.47			300	0.27	620		
ALC02TOR56K	0.56			280	0.30	590		
ALC02TOR68K	0.68			240	0.33	570		
ALC02TOR82K	0.82			210	0.35	540		
ALC02TO1R0K	1.0			190	0.40	510		
ALC02TO1R2K	1.2			110	0.43	490		
ALC02TO1R5K	1.5			80	0.48	460		
ALC02TO1R8K	1.8			70	0.53	440		
ALC02TO2R2K	2.2			60	0.60	420		
ALC02TO2R7K	2.7			55	0.68	390		
ALC02TO3R3K	3.3			50	0.75	370		
ALC02TO3R9K	3.9		45	0.83	350			
ALC02TO4R7K	4.7		40	40	0.91	340	7.96	
ALC02TO5R6K	5.6			35	1.0	320		
ALC02TO6R8K	6.8			30	1.1	300		
ALC02TO8R2K	8.2		35	26	1.3	290		
ALC02TO100K	10			24	1.4	270		
ALC02TO120K	12		40	22	1.4	270		2.52
ALC02TO150K	15			20	1.6	260		
ALC02TO180K	18			18	1.7	250		
ALC02TO220K	22			17	1.9	230		
ALC02TO270K	27			16	2.5	200		
ALC02TO330K	33			14	3.4	180		
ALC02TO390K	39			13	3.6	170		
ALC02TO470K	47			12	4.6	150		
ALC02TO560K	56			11	5.1	140		
ALC02TO680K	68			10	5.6	130		
ALC02TO820K	82		9.5	7.9	115			
ALC02TO101K	100		9.0	9.1	105			

○Please specify the taping configuration code.

○:A,B

ITEM-PART NUMBERS

AN02

Ordering code	Inductance [μ H]	Inductance Tolerance	Q (min.)	Self-resonant frequency [MHz] (min.)	DC Resistance [Ω] (max.)	Rated Current [mA] (max.)	Measuring frequency [MHz]		
AN02TOR12K	0.12	$\pm 10\%$ ($\pm 5\%$)	50	500	0.12	850	25.2		
AN02TOR15K	0.15			500	0.14	800			
AN02TOR18K	0.18			500	0.15	760			
AN02TOR22K	0.22			500	0.16	730			
AN02TOR27K	0.27			500	0.18	690			
AN02TOR33K	0.33			480	0.19	660			
AN02TOR39K	0.39			430	0.21	640			
AN02TOR47K	0.47			380	0.23	610			
AN02TOR56K	0.56			350	0.25	580			
AN02TOR68K	0.68			310	0.27	550			
AN02TOR82K	0.82			270	0.29	520			
AN02TOR1R0K	1.0			240	0.32	500			
AN02TOR1R2K	1.2			210	0.35	480			
AN02TOR1R5K	1.5			190	0.38	450			
AN02TOR1R8K	1.8			140	0.42	430			
AN02TOR2R2K	2.2			90	0.47	410			
AN02TOR2R7K	2.7			70	0.52	390			
AN02TOR3R3K	3.3			50	0.57	370			
AN02TOR3R9K	3.9		40	35	0.63	360	7.96		
AN02TOR4R7K	4.7			32	0.69	340			
AN02TOR5R6K	5.6			30	0.75	320			
AN02TOR6R8K	6.8			28	0.84	310			
AN02TOR8R2K	8.2			26	0.92	290			
AN02TOR100K	10			24	1.0	280			
AN02TOR120K	12			22	1.0	280			
AN02TOR150K	15			20	1.2	265			
AN02TOR180K	18			18	1.3	250			
AN02TOR220K	22			17	1.5	235			
AN02TOR270K	27			15	1.7	220			
AN02TOR330K	33			50	14	2.2		180	2.52
AN02TOR390K	39				13	2.4		170	
AN02TOR470K	47				12	2.8		160	
AN02TOR560K	56				10	4.1		140	
AN02TOR680K	68				9.2	4.5		130	
AN02TOR820K	82				8.8	5.0		125	
AN02TOR101K	100				8.0	5.6		120	
AN02TOR121K	120	6.6	9.2		90				
AN02TOR151K	150	5.8	10.5		85				
AN02TOR181K	180	5.4	11.5		80				
AN02TOR221K	220	4.8	13.0		75				
AN02TOR271K	270	3.6	16.0		70				
AN02TOR331K	330	3.4	18.0		66				
AN02TOR391K	390	3.2	20.0		63				
AN02TOR471K	470	3.0	22.0		60				
							0.796		

○Please specify the taping configuration code.

○:A,B

ITEM-PART NUMBERS

AL03

Ordering code	Inductance [μ H]	Inductance Tolerance	Q (min.)	Self-resonant frequency [MHz] (min.)	DC Resistance [Ω] (max.)	Rated Current [mA] (max.)	Measuring frequency [MHz]
AL03TOR22K	0.22	$\pm 10\%$ ($\pm 5\%$)	35	450	0.40	400	25.2
AL03TOR27K	0.27			410	0.43	380	
AL03TOR33K	0.33			360	0.48	370	
AL03TOR39K	0.39			300	0.51	350	
AL03TOR47K	0.47			230	0.56	330	
AL03TOR56K	0.56			210	0.61	320	
AL03TOR68K	0.68		40	190	0.67	310	7.96
AL03TOR82K	0.82			170	0.74	290	
AL03TO1R0K	1.0			150	0.80	270	
AL03TO1R2K	1.2			144	0.90	260	
AL03TO1R5K	1.5		131	1.0	250		
AL03TO1R8K	1.8		121	1.1	240		
AL03TO2R2K	2.2		110	1.2	230		
AL03TO2R7K	2.7		100	1.3	220		
AL03TO3R3K	3.3		94	1.4	210		
AL03TO3R9K	3.9		65	1.6	200		
AL03TO4R7K	4.7		56	1.7	190		
AL03TO5R6K	5.6		48	1.9	180		
AL03TO6R8K	6.8		37	2.0	175		
AL03TO8R2K	8.2		25	2.2	165		
AL03TO100K	10		21	2.3	160		
AL03TO120K	12		19	2.5	150		
AL03TO150K	15		17	2.8	145		
AL03TO180K	18		13	3.1	160		
AL03TO220K	22		9.6	3.4	130		
AL03TO270K	27		7.2	3.8	125		
AL03TO330K	33		6.3	4.1	120		
AL03TO390K	39		6.3	4.5	115		
AL03TO470K	47		6.3	4.9	110		
AL03TO560K	56		6.2	5.3	105		
AL03TO680K	68		5.7	5.8	100		
AL03TO820K	82		5.3	6.3	95		
AL03TO101K	100		4.8	7.0	90		
AL03TO121K	120		3.8	13	90		
AL03TO151K	150		3.5	15	85		
AL03TO181K	180		3.3	16	80		
AL03TO221K	220		3.0	17	75		
AL03TO271K	270		2.8	19	65		
AL03TO331K	330		2.6	20	60		
AL03TO391K	390		2.4	22	55		
AL03TO471K	470	2.25	24	55			
AL03TO561K	560	2.10	26	50			
AL03TO681K	680	1.95	28	45			
AL03TO821K	820	1.85	30	40			
AL03TO102K	1000	1.40	33	40			
			50				
							0.796

○Please specify the taping configuration code.

○:A,B

ITEM-PART NUMBERS

AL04

Ordering code	Inductance [μ H]	Inductance Tolerance	Q (min.)	Self-resonant frequency [MHz] (min.)	DC Resistance [Ω] (max.)	Rated Current [mA] (max.)	Measuring frequency [MHz]
AL04TOR22K	0.22	±10% (±5%)	45	300	0.10	1400	25.2
AL04TOR27K	0.27			270	0.11	1320	
AL04TOR33K	0.33			250	0.12	1280	
AL04TOR39K	0.39			230	0.13	1200	
AL04TOR47K	0.47			220	0.14	1150	
AL04TOR56K	0.56			200	0.15	1100	
AL04TOR68K	0.68			190	0.16	1030	
AL04TOR82K	0.82			172	0.17	980	
AL04TO1R0K	1.0			157	0.19	920	
AL04TO1R2K	1.2			144	0.21	880	
AL04TO1R5K	1.5		131	0.23	830		
AL04TO1R8K	1.8		121	0.25	790		
AL04TO2R2K	2.2		110	0.28	750		
AL04TO2R7K	2.7		100	0.30	720		
AL04TO3R3K	3.3		94	0.34	670		
AL04TO3R9K	3.9		65	0.37	640		
AL04TO4R7K	4.7		56	0.39	620		
AL04TO5R6K	5.6		48	0.43	590		
AL04TO6R8K	6.8		37	0.48	550		
AL04TO8R2K	8.2		25	0.52	530		
AL04TO100K	10		21	0.58	500		
AL04TO120K	12		19	0.63	480		
AL04TO150K	15		17	0.72	460		
AL04TO180K	18		13	0.77	430		
AL04TO220K	22		9.6	0.84	410		
AL04TO270K	27		7.2	0.94	390		
AL04TO330K	33		6.3	1.03	370		
AL04TO390K	39		50	6.3	1.12	350	
AL04TO470K	47		45	6.3	1.22	340	
AL04TO560K	56		40	6.2	1.34	320	
AL04TO680K	68		35	5.7	1.47	305	
AL04TO820K	82		30	5.3	1.62	290	
AL04TO101K	100		55	3.8	3.70	185	
AL04TO121K	120		45	3.5	4.20	175	
AL04TO151K	150		50	3.3	4.60	165	
AL04TO181K	180		55	3.0	5.10	155	
AL04TO221K	220		65	2.8	5.80	145	
AL04TO271K	270		65	2.6	6.40	137	
AL04TO331K	330		65	2.4	7.00	133	
AL04TO391K	390		60	2.25	7.70	126	
AL04TO471K	470		60	2.10	8.50	120	
AL04TO561K	560		55	1.95	9.40	113	
AL04TO681K	680		55	1.85	10.5	105	
AL04TO821K	820		50	1.40	14.0	100	
AL04TO102K	1000		50	1.20	22.0	110	
AL04TO122K	1200			1.10	25.0	100	
AL04TO182K	1800			0.98	28.0	90	
AL04TO222K	2200			0.90	40.0	80	
AL04TO272K	2700			0.85	44.0	70	
AL04TO332K	3300			0.81	50.0	70	
AL04TO392K	3900	0.72		63.0	60		
AL04TO472K	4700	0.60		69.0	55		
AL04TO562K	5600	0.55		77.0	50		
AL04TO682K	6800	0.50		104.0	45		
AL04TO822K	8200	0.48	116.0	45			
AL04TO103K	10000	30	0.40	148.0	35		

○Please specify the taping configuration code.

○:B

ITEM-PART NUMBERS

AL05







Ordering code	Inductance [μ H]	Inductance Tolerance	Q (min.)	Self-resonant frequency [MHz] (min.)	DC Resistance [Ω] (max.)	Rated Current [mA] (max.)	Measuring frequency [MHz]
AL05T○1R0K	1.0	± 10%	10	300	0.022	5600	7.96
AL05T○1R2K	1.2			260	0.024	5500	
AL05T○1R5K	1.5			250	0.026	5000	
AL05T○1R8K	1.8			240	0.029	4700	
AL05T○2R2K	2.2			220	0.031	4500	
AL05T○2R7K	2.7			195	0.034	4000	
AL05T○3R3K	3.3			155	0.038	3400	
AL05T○3R9K	3.9			115	0.040	3100	
AL05T○4R7K	4.7			85	0.044	2800	
AL05T○5R6K	5.6			55	0.048	2600	
AL05T○6R8K	6.8			50	0.051	2400	
AL05T○8R2K	8.2			38	0.056	2200	
AL05T○100K	10			24	0.062	2100	
AL05T○120K	12			18	0.076	1800	2.52
AL05T○150K	15			16	0.088	1700	
AL05T○180K	18			15	0.110	1600	
AL05T○220K	22			14	0.130	1400	
AL05T○270K	27			13	0.140	1300	
AL05T○330K	33			11	0.200	1200	
AL05T○390K	39			10	0.220	1100	
AL05T○430K	43			9.5	0.280	1000	
AL05T○470K	47			9.5	0.280	1000	
AL05T○560K	56		8.0	0.300	900		
AL05T○680K	68		7.5	0.340	800		
AL05T○820K	82		7.0	0.385	700		
AL05T○101K	100		6.5	0.480	700	0.796	
AL05T○121K	120		5.0	0.595	600		
AL05T○151K	150		4.5	0.900	550		
AL05T○181K	180		4.0	1.10	500		
AL05T○221K	220		3.8	1.25	440		
AL05T○271K	270		3.5	1.85	420		
AL05T○331K	330		3.0	2.10	380		
AL05T○331K	330		2.8	2.28	340		
AL05T○471K	470	2.5	3.22	320			
AL05T○561K	560	2.2	3.85	290			
AL05T○681K	680	2.1	4.00	260			
AL05T○821K	820	2.0	5.00	250			
AL05T○102K	1000	1.8	5.80	240			
AL05T○122K	1200	1.6	7.10	200			
AL05T○152K	1500	1.5	7.80	190			

○Please specify the taping configuration code.


○:B

ELECTRICAL CHARACTERISTICS


DC Bias Characteristics

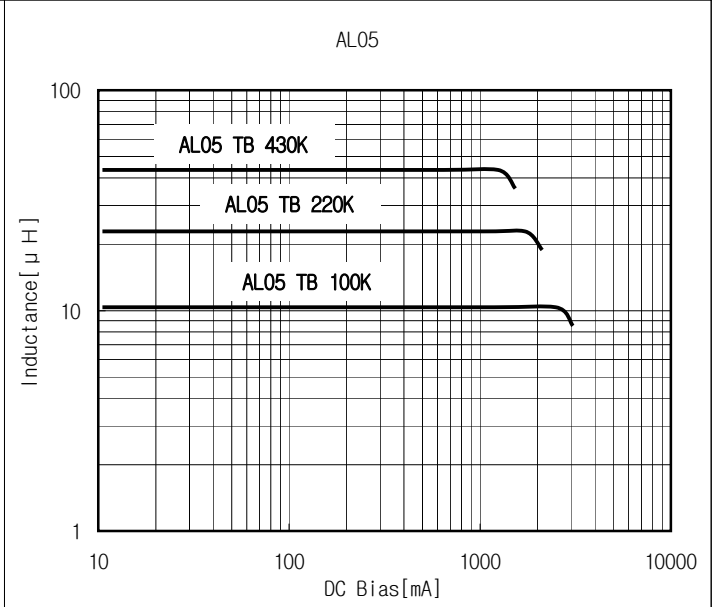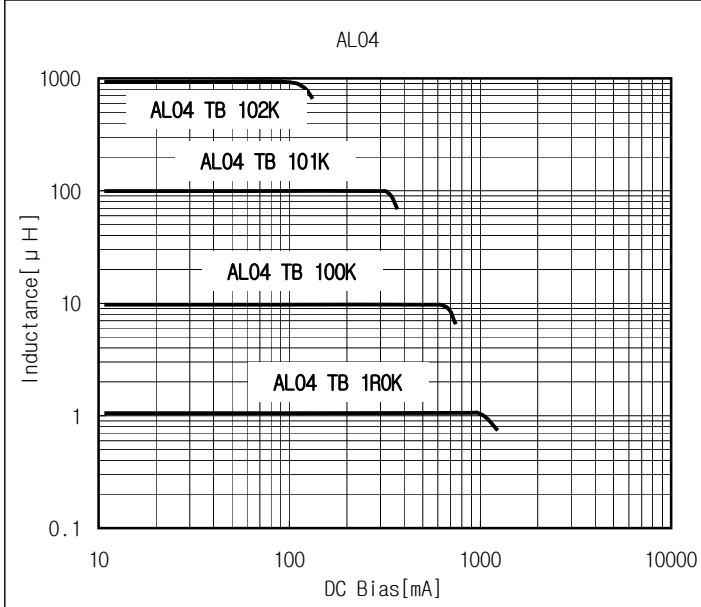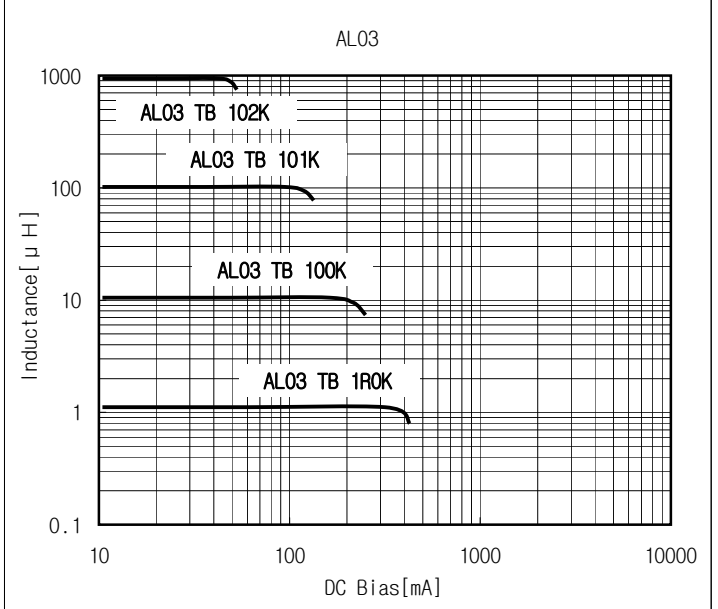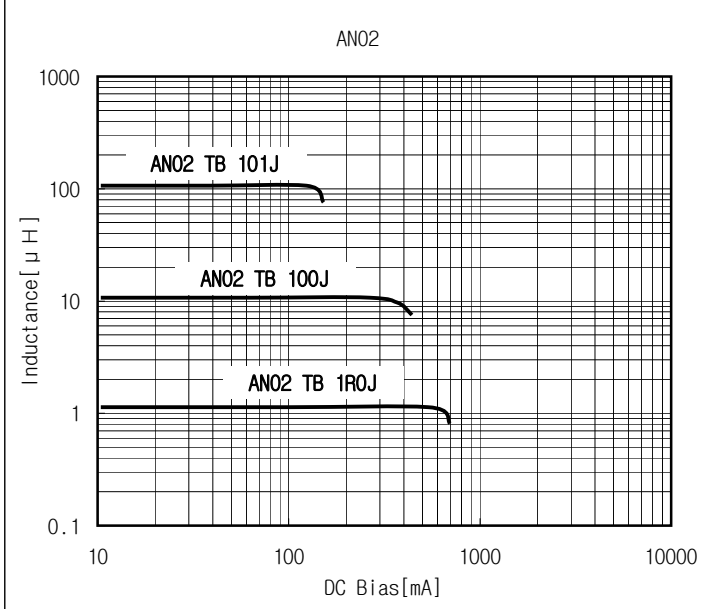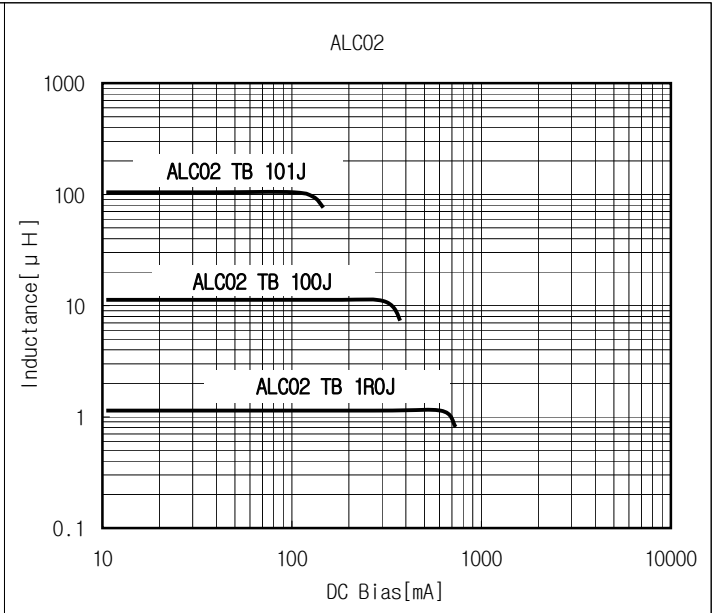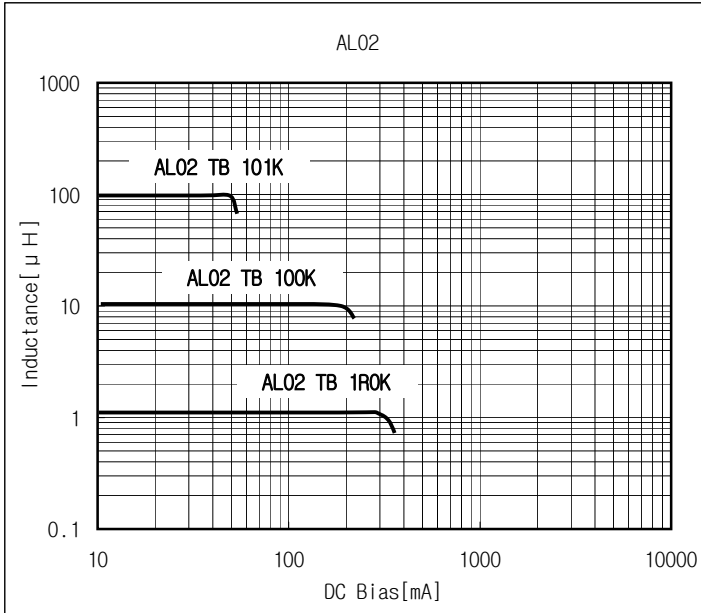

Temperature Characteristics

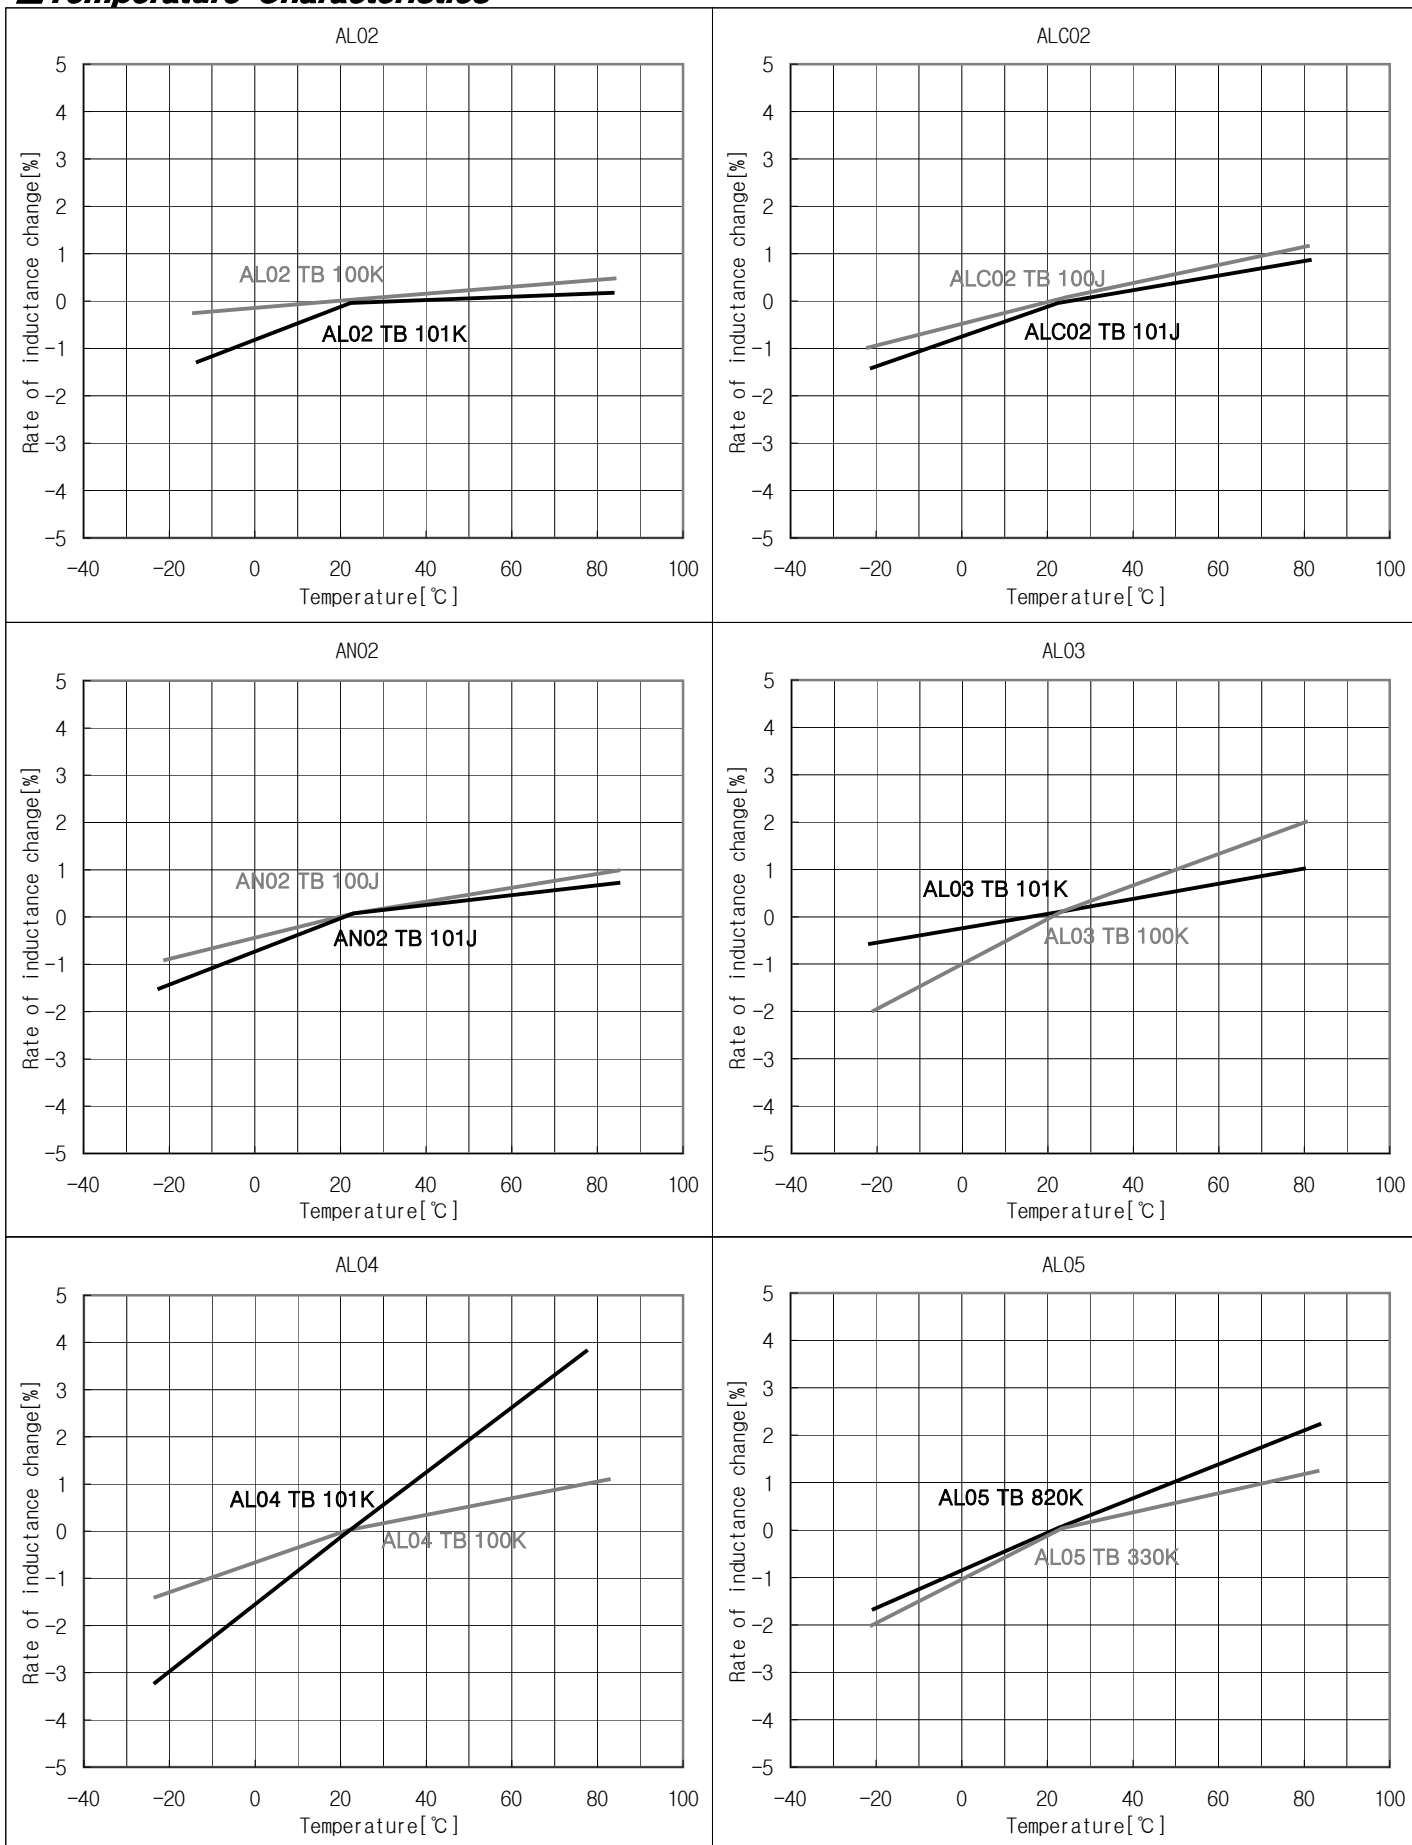


■ Q vs Frequency Characteristics

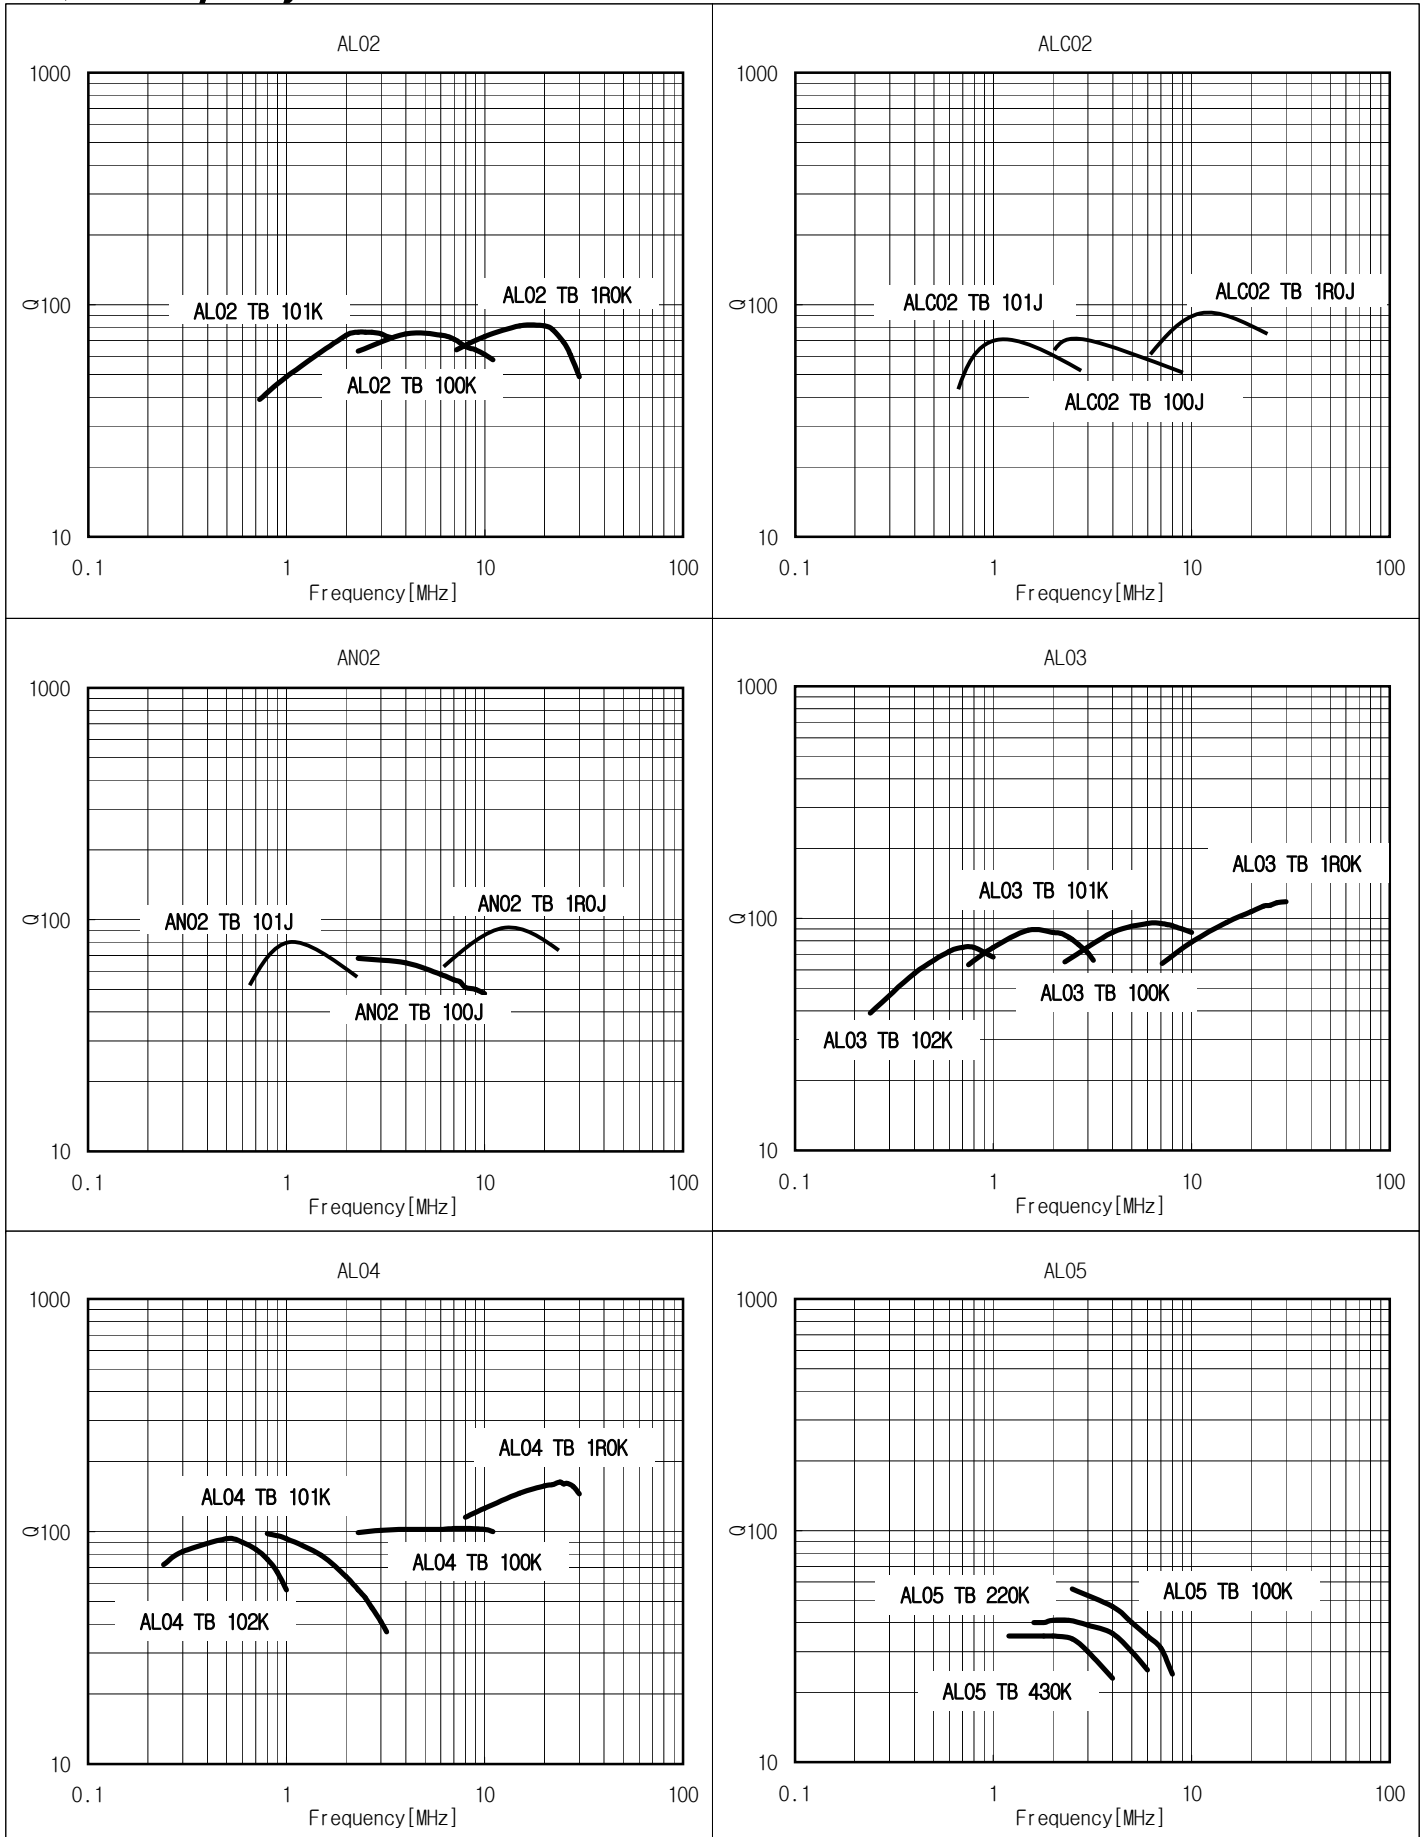

SHAPE DIMENSIONS


TA(26mm)

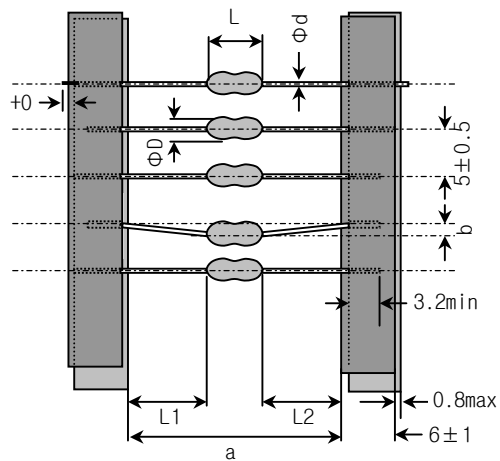

Unit:mm

Type	Dimensions						Pitch Minimum insertion pitch	Inner Box(Q'ty)
	ϕD	L	a	b	L1-L2	ϕd		
AL02 ALC02	2.5max	3.4max	$26^{+0.5}_{-0}$	0.8max	0.5max	0.45 ± 0.05	5.0	2,000
AN02	2.5max	3.7max	$26^{+0.5}_{-0}$	0.8max	0.5max	0.45 ± 0.05	5.0	
AL03	3.0max	7.0max	$26^{+1}_{-0.5}$	0.8max	1.0max	0.50 ± 0.05	10.0	

TB(52mm)

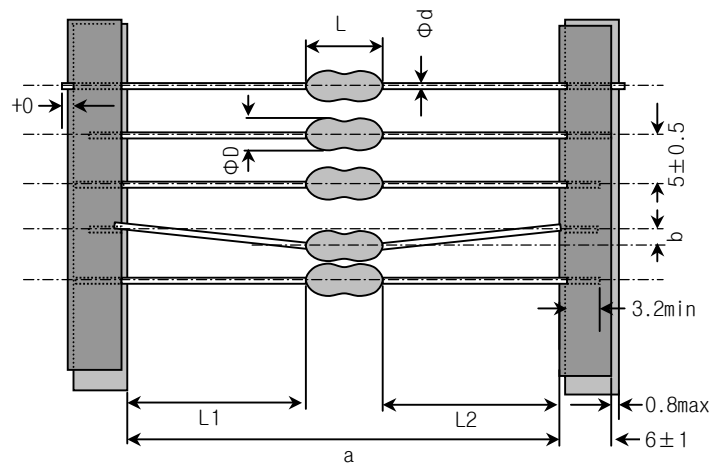

Unit:mm

Type	Dimensions						Pitch Minimum insertion pitch	Inner Box(Q'ty)
	ϕD	L	a	b	L1-L2	ϕd		
AL02 ALC02	2.5max	3.4max	52^{+2}_{-1}	1.2max	1.0max	0.50 ± 0.05	5.0	2,500
AN02	2.5max	3.7max	52^{+2}_{-1}	1.2max	1.0max	0.50 ± 0.05	7.5	
AL03	3.0max	7.0max	52^{+2}_{-1}	1.2max	1.0max	0.50 ± 0.05	10.0	
AL04	4.2max	9.8max	52^{+2}_{-1}	1.2max	1.0max	0.65 ± 0.05	12.5	2,000
AL05	4.5max	14max	52^{+2}_{-1}	1.2max	1.0max	0.65 ± 0.05	20.0	

RELIABILITY

Item		Specified Value	Test Methods and Remarks												
1. Operating Temperature Range		-25~+85℃	Including self-generated heat.												
2. Storage Temperature Range		-40~+85℃													
3. Self Resonant Frequency		Within the specified tolerance	Measuring equipment: Dip meter or HP4294A its equivalent												
4. DC Resistance		Within the specified tolerance	Measuring equipment :mΩHiTester(3226 or its equivalent)												
5. DC Bias Characteristic		ΔL/L→Within -10%	Measure inductance with application of rated current using LCR meter to compare it with the initial value.												
6. Inductance		Within the specified tolerance	Measuring equipment AL02,ALC02,AN02,AL03,AL04 : LCR METER HP4285A AL05,35,40,45 : IMPEDANCE/GAIN-PHASE ANALYZER HP4194A Measuring frequency:Specified frequency												
7. Q															
8. Temperature Characteristics		ΔL/L→Within ±5%	Change of maximum inductance deviation in step 1to6 <table border="1"> <thead> <tr> <th>Step</th> <th>Temperature(℃)</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>20</td> </tr> <tr> <td>2</td> <td>-25(minimum operating temperature)</td> </tr> <tr> <td>3</td> <td>20(Reference temperature)</td> </tr> <tr> <td>4</td> <td>+85(Maximum operation temperature)</td> </tr> <tr> <td>5</td> <td>20</td> </tr> </tbody> </table>	Step	Temperature(℃)	1	20	2	-25(minimum operating temperature)	3	20(Reference temperature)	4	+85(Maximum operation temperature)	5	20
Step	Temperature(℃)														
1	20														
2	-25(minimum operating temperature)														
3	20(Reference temperature)														
4	+85(Maximum operation temperature)														
5	20														
9. Rated current		Within the specified tolerance	Measuring equipment:LCR METER HP4284A The maximum DC value having inductance decrease within 10% and temperature increase within 20℃ by the application of DC bias												
10. Terminal Strength	Tensile	No abnormality such as cutoff or looseness of lead	Apply the stated tensile force progressively in the direction to draw terminal <table border="1"> <thead> <tr> <th>Tensile force (N)</th> <th>Duration (S)</th> </tr> </thead> <tbody> <tr> <td>25</td> <td>5</td> </tr> </tbody> </table>	Tensile force (N)	Duration (S)	25	5								
	Tensile force (N)	Duration (S)													
25	5														
Bending	No abnormality such as cutoff or looseness of lead	Suspend a mass at the terminal, incline the body through angle of 90° and return it to initial position is This operation in done over a period of 2~3 sec. Then a second bend in the opposite direction shall be made. Number of bends : Two times. <table border="1"> <thead> <tr> <th>Nominal wire diameter (mm)</th> <th>Bending force (N)</th> <th>Mass weight (kg)</th> </tr> </thead> <tbody> <tr> <td>0.3<Φd≤0.5</td> <td>2.5</td> <td>0.25</td> </tr> <tr> <td>0.5<Φd≤0.8</td> <td>5</td> <td>0.5</td> </tr> </tbody> </table>	Nominal wire diameter (mm)	Bending force (N)	Mass weight (kg)	0.3<Φd≤0.5	2.5	0.25	0.5<Φd≤0.8	5	0.5				
Nominal wire diameter (mm)	Bending force (N)	Mass weight (kg)													
0.3<Φd≤0.5	2.5	0.25													
0.5<Φd≤0.8	5	0.5													

Item	Specified Value	Test Methods and Remarks															
11.Body Strength	No abnormality such as damage	Applied force:5Kg Duration:10sec Speed:Shall attain to specified force in 2sec.															
12.Resistance to vibration		Duration:2hrs each in X,Y and Z directions Total:6hrs Frequency range:10 to 55 to 10Hz (1min.) Amplitude:1.5mm Mounting method:Soldering onto printed board. Recovery:At least 1 hr of recovery under the standard condition after the test, followed by the measurement within 2hrs.															
13.Resistance to Shock		Drop test impact material:Concrete of vinyl tile Height:1m Total number of drops:10 times															
14.Solderability	At least 95% of terminal electrode is covered by new solder.	Solder temperature:230±5℃ duration:3±0.5sec.															
15.Resistance to Soldering Heat	△L/L→Within±5% Q→Within±30% No significant abnormality in appearance ※ Reflow condition 245℃/20sec , 260℃/10sec	Solder temperature:270±5℃ Duration:5±0.5sec. Once Immersed conditions:DIPPING UNDER 3mm FORM WOUND BODY. Recovery:At least 1hr of recovery under the standard condition after the test, followed by the measurement within 2hrs.															
16.Thermal Shock	△L/L→Within±10% Q→Within±30%	<p>Conditions for 1 cycle</p> <table border="1" data-bbox="965 1146 1493 1406"> <thead> <tr> <th>Step</th> <th>Temperature(℃)</th> <th>Duration(min)</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>+0 -25 -3</td> <td>30±3</td> </tr> <tr> <td>2</td> <td>Room temperature</td> <td>within 3</td> </tr> <tr> <td>3</td> <td>+85 +2 -0</td> <td>30±3</td> </tr> <tr> <td>4</td> <td>Room temperature</td> <td>within 3</td> </tr> </tbody> </table> <p>Number of cycles : 10 Recovery:At least 1hr of recovery under the standard condition after the removal from test chamber, followed by the measurement within 2hrs.</p>	Step	Temperature(℃)	Duration(min)	1	+0 -25 -3	30±3	2	Room temperature	within 3	3	+85 +2 -0	30±3	4	Room temperature	within 3
Step	Temperature(℃)	Duration(min)															
1	+0 -25 -3	30±3															
2	Room temperature	within 3															
3	+85 +2 -0	30±3															
4	Room temperature	within 3															
17.Damp Heat	△L/L→Within±10% Q→Within±30%	Temperature:40±2℃ Humidity:90to95% RH Duration:1000hrs Recovery:At least 1hr of recovery under the standard condition after the removal from test chamber, followed by the measurement within 2hrs.															
18.Loading under Damp Heat	△L/L→Within±10% Q→Within±30%	Temperature:40±2℃ Humidity:90to95% RH Duration:1000hrs Applied current:Rated current Recovery:At least 1hr of recovery under the standard condition after the removal from test chamber, followed by the measurement within 2hrs.															

Item	Specified Value	Test Methods and Remarks
19.Loading at High Temperature	$\Delta L/L \rightarrow$ Within $\pm 10\%$ $Q \rightarrow$ Within $\pm 30\%$	Temperature: $85 \pm 2^\circ\text{C}$ Duration: 1000hrs Applied current: Rated current Recovery: At least 1hr of recovery under the standard condition after the removal from test chamber, followed by the measurement within 2hrs.
20.Low Temperature Life Test	$\Delta L/L \rightarrow$ Within $\pm 10\%$ $Q \rightarrow$ Within $\pm 30\%$	Temperature: $-25 \pm 2^\circ\text{C}$ Duration: 1000hrs Recovery: At least 1hr of recovery under the standard condition after the removal from test chamber, followed by the measurement within 2hrs.

Note on standard condition: "standard condition" referred to herein is defined as follows

5to 35°C of temperature, 45to85% relative humidity and 86to 106kPa of air pressure.

When there are questions concerning measueent results:

In order to provide correlation data, the test shall be conducted under condition of $20 \pm 2^\circ\text{C}$ of temperature, 45to 85% relative humidity and 86 to 106kPa of air pressure Unless otherwise specified, all the tests are conducted under the "standard condition"